


## M587WD61LED5V30-BL

**ARTEMIS ViVo recessed round super comfort downlight, Wide light distribution, 15-cm Dia., 3000K, LED5, 3100 Lumens, 36W, Black**



### About Product

ARTEMIS modern recessed round super comfort (Darklight) downlight luminaire is designed and manufactured by Megalite in various sizes for modern office and commercial lighting applications. Durability, UV free, excellent visual comfort, energy saving, glare control, environment friendliness, and higher than 80 color rendering index (CRI) are among the highlights of this luminaire.



### Technical Information

|                              |                                                                 |
|------------------------------|-----------------------------------------------------------------|
| Luminaire Name:              | ARTEMIS                                                         |
| Catalog Code/product code:   | M587WD61LED5V30-BL                                              |
| Mounting Type:               | Recessed-Concealed false ceiling, Recessed-Gypsum false ceiling |
| Application:                 | Hospitality, Shopping centers, Gallery and museum               |
| Light source type:           | LED                                                             |
| Module/ Lamp quantity:       | 1                                                               |
| CCT (Color temperature):     | 3000K - Warm White                                              |
| Light source:                | LED                                                             |
| LED Module brand name:       | Philips                                                         |
| Lumen maintenance:           | > 100.000 hours                                                 |
| Lumen maintenance factor:    | L85                                                             |
| CRI (Color rendering index): | > 90                                                            |
| Power Consumption:           | 36                                                              |
| Luminous Flux:               | 3100                                                            |
| Efficacy (lm/W):             | 86                                                              |
| IP (Ingress Protection):     | IP43 (Underside)                                                |
| Insulation Class:            | Class II                                                        |
| Ballast/ Driver:             | Constant Current Driver (PF> 0.9)                               |
| Ballast/ Driver brand name:  | Vossloh Schwabe                                                 |
| FLICKER:                     | Flicker Free                                                    |


**M587WD61LED5V30-BL**
**ARTEMIS ViVo recessed round super comfort downlight, Wide light distribution, 15-cm Dia., 3000K, LED5, 3100 Lumens, 36W, Black**

|                                         |                                                       |
|-----------------------------------------|-------------------------------------------------------|
| Ballast/ driver Spec:                   | Non-dimmable                                          |
| Mains voltage:                          | 220~240 VAC±10%                                       |
| Voltage Frequency:                      | 50/60 Hz                                              |
| Wire / Cable Spec:                      | PVC solid wire                                        |
| Wire cross section:                     | 0.5                                                   |
| Terminal material:                      | Polycarbonate                                         |
| Terminal Spec:                          | 2 pole (Size: 2.5)                                    |
| Body Material:                          | Die-Cast aluminum                                     |
| Body Coating:                           | Powder coated                                         |
| Body Color:                             | Black                                                 |
| RAL:                                    | RAL9005                                               |
| Body Characteristic:                    | Specially designed cooling feature                    |
| Reflector Material:                     | aluminum sheet                                        |
| Reflector Coating:                      | Pre-anodized                                          |
| Diffuser/Glass Material:                | Acrylic sheet                                         |
| Diffuser/Glass Shape:                   | Clear                                                 |
| Diffuser/Glass Characteristic:          | Uniform light distribution                            |
| Light Distribution:                     | 55 degrees                                            |
| Clamp Material:                         | Stainless steel                                       |
| Clamp Characteristic:                   | Easy and safe tool free installation of the luminaire |
| Packaging type:                         | Nylon cover and carton                                |
| Weight(Kg):                             | 0.65                                                  |
| Dimensions(mm):                         | Ø168x130                                              |
| Luminaire mechanical impact resistance: | -                                                     |
| Order Option (Routine option):          | Dimmable DALI PUSH driver, 6500K color temperature    |

## M587WD61LED5V30-BL

**ARTEMIS ViVo recessed round super comfort downlight, Wide light distribution, 15-cm Dia., 3000K, LED5, 3100 Lumens, 36W, Black**

### Photometric Graph

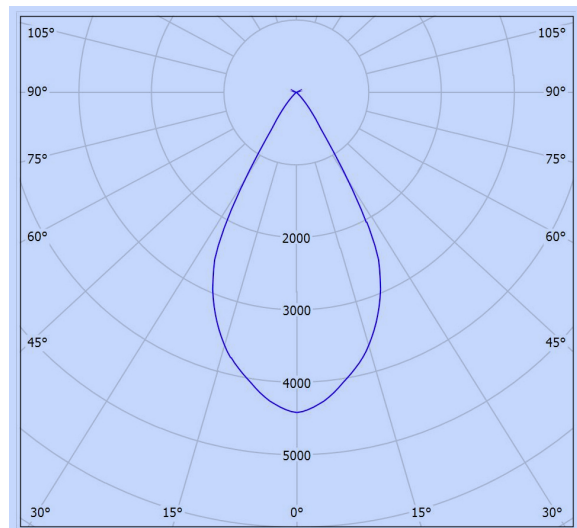

| Glare Evaluation According to UGR                                |     |                                                   |      |      |      |      |                                            |      |      |      |      |
|------------------------------------------------------------------|-----|---------------------------------------------------|------|------|------|------|--------------------------------------------|------|------|------|------|
| p Ceiling                                                        |     | 70                                                | 70   | 50   | 50   | 30   | 70                                         | 70   | 50   | 50   | 30   |
| p Walls                                                          |     | 50                                                | 30   | 50   | 30   | 30   | 50                                         | 30   | 50   | 30   | 30   |
| p Floor                                                          |     | 20                                                | 20   | 20   | 20   | 20   | 20                                         | 20   | 20   | 20   | 20   |
| Room Size<br>X Y                                                 |     | Viewing direction at right angles<br>to lamp axis |      |      |      |      | Viewing direction parallel<br>to lamp axis |      |      |      |      |
| 2H                                                               | 2H  | 12.8                                              | 13.5 | 13.0 | 13.6 | 13.8 | 12.8                                       | 13.5 | 13.0 | 13.6 | 13.8 |
|                                                                  | 3H  | 12.7                                              | 13.3 | 13.0 | 13.5 | 13.7 | 12.7                                       | 13.3 | 13.0 | 13.5 | 13.7 |
|                                                                  | 4H  | 12.6                                              | 13.2 | 12.9 | 13.4 | 13.7 | 12.6                                       | 13.2 | 12.9 | 13.4 | 13.7 |
|                                                                  | 6H  | 12.5                                              | 13.1 | 12.9 | 13.3 | 13.6 | 12.5                                       | 13.1 | 12.9 | 13.3 | 13.6 |
|                                                                  | 8H  | 12.5                                              | 13.0 | 12.9 | 13.3 | 13.6 | 12.5                                       | 13.0 | 12.9 | 13.3 | 13.6 |
|                                                                  | 12H | 12.5                                              | 13.0 | 12.8 | 13.3 | 13.6 | 12.5                                       | 13.0 | 12.8 | 13.3 | 13.6 |
| 4H                                                               | 2H  | 12.6                                              | 13.2 | 12.9 | 13.4 | 13.7 | 12.6                                       | 13.2 | 12.9 | 13.4 | 13.7 |
|                                                                  | 3H  | 12.5                                              | 12.9 | 12.8 | 13.2 | 13.5 | 12.5                                       | 12.9 | 12.8 | 13.2 | 13.5 |
|                                                                  | 4H  | 12.4                                              | 12.8 | 12.8 | 13.1 | 13.5 | 12.4                                       | 12.8 | 12.8 | 13.1 | 13.5 |
|                                                                  | 6H  | 12.4                                              | 12.7 | 12.8 | 13.1 | 13.4 | 12.4                                       | 12.7 | 12.8 | 13.1 | 13.4 |
|                                                                  | 8H  | 12.3                                              | 12.6 | 12.7 | 13.0 | 13.4 | 12.3                                       | 12.6 | 12.7 | 13.0 | 13.4 |
|                                                                  | 12H | 12.3                                              | 12.6 | 12.7 | 13.0 | 13.4 | 12.3                                       | 12.6 | 12.7 | 13.0 | 13.4 |
| 8H                                                               | 4H  | 12.3                                              | 12.6 | 12.7 | 13.0 | 13.4 | 12.3                                       | 12.6 | 12.7 | 13.0 | 13.4 |
|                                                                  | 6H  | 12.2                                              | 12.5 | 12.7 | 12.9 | 13.3 | 12.2                                       | 12.5 | 12.7 | 12.9 | 13.3 |
|                                                                  | 8H  | 12.2                                              | 12.4 | 12.7 | 12.9 | 13.3 | 12.2                                       | 12.4 | 12.7 | 12.9 | 13.3 |
|                                                                  | 12H | 12.2                                              | 12.4 | 12.7 | 12.8 | 13.3 | 12.2                                       | 12.4 | 12.7 | 12.8 | 13.3 |
|                                                                  | 4H  | 12.3                                              | 12.5 | 12.7 | 12.9 | 13.3 | 12.3                                       | 12.5 | 12.7 | 12.9 | 13.3 |
|                                                                  | 6H  | 12.2                                              | 12.4 | 12.7 | 12.8 | 13.3 | 12.2                                       | 12.4 | 12.7 | 12.8 | 13.3 |
| 12H                                                              | 8H  | 12.2                                              | 12.3 | 12.7 | 12.8 | 13.3 | 12.2                                       | 12.3 | 12.7 | 12.8 | 13.3 |
|                                                                  | 12H | 12.2                                              | 12.3 | 12.7 | 12.8 | 13.3 | 12.2                                       | 12.3 | 12.7 | 12.8 | 13.3 |
| Variation of the observer position for the luminaire distances S |     |                                                   |      |      |      |      |                                            |      |      |      |      |
| S = 1.0H                                                         |     | +5.8 / -10.6                                      |      |      |      |      | +5.8 / -10.6                               |      |      |      |      |
| S = 1.5H                                                         |     | +8.6 / -11.1                                      |      |      |      |      | +8.6 / -11.1                               |      |      |      |      |
| S = 2.0H                                                         |     | +10.6 / -11.5                                     |      |      |      |      | +10.6 / -11.5                              |      |      |      |      |
| Standard table                                                   |     | BK00                                              |      |      |      |      | BK00                                       |      |      |      |      |
| Correction                                                       |     | -5.8                                              |      |      |      |      | -5.8                                       |      |      |      |      |
| Summand                                                          |     | -5.8                                              |      |      |      |      | -5.8                                       |      |      |      |      |

### Dimensional Drawing

