

M317EMW1LED3840-W

POLARIS M (DOB) floodlight, Wide light distribution, 4000K, LED3, 5500 Lumens, 60W, Milk white



About Product

POLARIS floodlight luminaire is designed and manufactured by Megalite for outdoor floodlight applications. Durability, high ingress protection (IP65), and low energy consumption among the highlights of this luminaire.

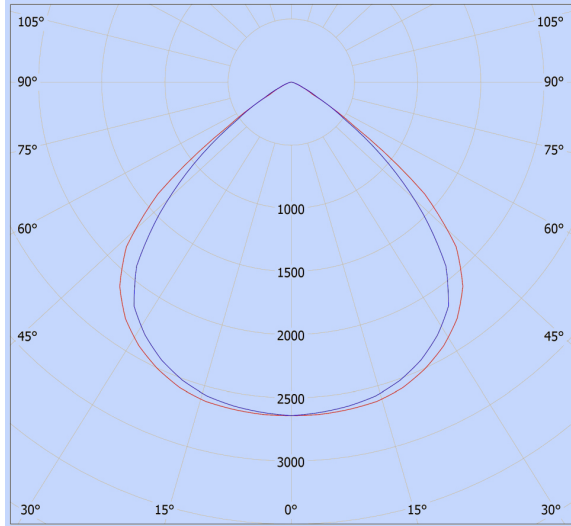


Technical Information

Catalogue Code/product code:	M317EMW1LED3840-W
Mounting Type:	Horizontal boom mounting, Wall mounting with bracket, Ground mounting, Wall Mounted; Surface Mounted, Surface Mounted, Vertical pole mounting
Application:	Facade and architectural lighting
Light source type:	DOB LED (PF> 0.9)
Module/ Lamp quantity:	1
CCT (Color temperature):	4000K - Neutral White
Light source:	LED
LED Module brand name:	Edison
Lumen maintenance:	> 50.000 hours
Lumen maintenance factor:	L70
CRI (Color rendering index):	> 80
Power Consumption:	60
Luminous Flux:	5500
Efficacy (lm/W):	92
IP (Ingress Protection):	IP65
Insulation Class:	Class I
Max. Ambient Temperature:	+50°C
Min. Ambient Temperature:	-30°C
Mains voltage:	220~240 VAC

M317EMW1LED3840-W
POLARIS M (DOB) floodlight, Wide light distribution, 4000K, LED3, 5500 Lumens, 60W, Milk white

Voltage Frequency:	50 Hz
Wire / Cable Spec:	GF PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Terminal Spec:	Cable looping is possible. Tool free wire connection. 3-Pole (Size: 2.5)
Cable Gland Spec:	Polyamide
Cable gland type:	M16
Body Material:	Die-Cast aluminum
Body Coating:	Powder coated
Body Color:	Milk white
RAL:	RAL9002
Body Characteristic:	Specially designed cooling feature
Diffuser/Glass Material:	Tempered glass
Diffuser/Glass Shape:	Flat
Diffuser/Glass Characteristic:	4mm thickness
Lens Material:	Clear polycarbonate
Lens Characteristic:	Symmetrical light distribution with lens
Light Distribution:	90 degrees
Gasket Material:	silicon
Gasket Characteristic:	High thermal resistance. Resistant to pressure. Ingress protection against dust and moisture
Interior Connection Material:	Galvanized coated
Exterior Connection Material:	Dacromet coated
Packaging type:	Nylon cover and carton
Weight(Kg):	1.4
Dimensions(mm):	190x240x50
Luminaire mechanical impact resistance:	IK09

M317EMW1LED3840-W**POLARIS M (DOB) floodlight, Wide light distribution, 4000K, LED3, 5500 Lumens, 60W, Milk white****Photometric Graph****Dimensional Drawing**