


M317EXSW1LED1865-W

POLARIS XS (DOB) floodlight, Wide light distribution, 6500K, LED1, 2000 Lumens, 20W, Milk white



About Product

POLARIS floodlight is designed and manufactured by Megalite for outdoor and indoor floodlight applications. Durability, high ingress protection (IP65), and low energy consumption are among the highlights of this luminaire.



Technical Information

Luminaire Name:	POLARIS
Catalog Code/product code:	M317EXSW1LED1865-W
Mounting Type:	Ground mounting, Wall Mounted; Surface Mounted, Surface Mounted, Vertical pole mounting, Horizontal boom mounting, Wall mounting with bracket
Application:	Facade and architectural lighting
Light source type:	DOB LED (PF> 0.9)
Module/ Lamp quantity:	1
CCT (Color temperature):	6500K - Daylight
Light source:	LED
Lumen maintenance:	> 50.000 hours
Lumen maintenance factor:	L70
CRI (Color rendering index):	> 80
Power Consumption:	20
Luminous Flux:	2000
Efficacy (lm/W):	100
IP (Ingress Protection):	IP65
Insulation Class:	Class I
Max. Ambient Temperature:	55°C
Min. Ambient Temperature:	-30°C
FLICKER:	Flicker Free


M317EXSW1LED1865-W
POLARIS XS (DOB) floodlight, Wide light distribution, 6500K, LED1, 2000 Lumens, 20W, Milk white

Mains voltage:	220~240 VAC
Voltage Frequency:	50 Hz
Wire / Cable Spec:	GF PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Terminal Spec:	3-Pole (Size: 2.5), Cable looping is possible, Tool free wire connection
Cable Looping:	Yes
Cable Gland Spec:	Polyamide
Cable gland type:	M16
Body Material:	Die-Cast aluminum
Body Coating:	Powder coated
Body Color:	Milk white
RAL:	RAL9002
Body Characteristic:	Specially designed cooling feature
Diffuser/Glass Material:	Tempered glass
Diffuser/Glass Shape:	Flat
Diffuser/Glass Characteristic:	5mm thickness
Lens Material:	Clear polycarbonate
Light Distribution:	90 degrees
Gasket Material:	silicon
Gasket Characteristic:	High thermal resistance, Resistant to pressure, Ingress protection against dust and moisture
Interior Connection Material:	Galvanized coated
Exterior Connection Material:	Dacromet coated
Packaging type:	Nylon cover and carton
Weight(Kg):	0.86
Dimensions(mm):	190x140x50
Luminaire mechanical impact resistance:	IK09

M317EXSW1LED1865-W

POLARIS XS (DOB) floodlight, Wide light distribution, 6500K, LED1, 2000 Lumens, 20W, Milk white

Photometric Graph

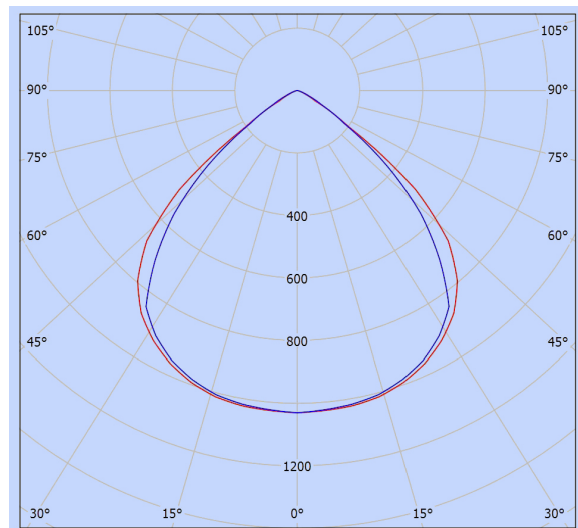

Glare Evaluation According to UGR

Room	Room Size X Y	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis
p Ceiling	70 70 50 50 30	70 70 50 50 30	70 70 50 50 30
p Walls	50 30 50 30 30	50 30 50 30 30	50 30 50 30 30
p Floor	20 20 20 20 20	20 20 20 20 20	20 20 20 20 20
2H	2H 14.1 15.0 14.3 15.3 15.5	19.8 20.8 20.1 21.0 21.2	
3H	3H 14.2 15.0 14.5 15.3 15.5	19.8 20.7 20.1 20.9 21.2	
4H	4H 14.1 15.0 14.5 15.2 15.5	19.8 20.6 20.1 20.8 21.1	
6H	6H 14.1 14.9 14.4 15.1 15.4	19.7 20.5 20.0 20.7 21.0	
8H	8H 14.1 14.8 14.4 15.1 15.4	19.7 20.4 20.0 20.7 21.0	
12H	12H 14.0 14.7 14.4 15.0 15.3	19.6 20.3 20.0 20.6 20.9	
4H	2H 14.3 15.1 14.6 15.4 15.7	19.7 20.5 20.0 20.7 21.0	
3H	3H 14.4 15.1 14.8 15.4 15.7	19.7 20.4 20.1 20.7 21.0	
4H	4H 14.4 15.0 14.8 15.3 15.7	19.7 20.3 20.1 20.6 21.0	
6H	6H 14.4 14.9 14.8 15.2 15.6	19.6 20.1 20.0 20.5 20.9	
8H	8H 14.3 14.8 14.8 15.2 15.6	19.6 20.0 20.0 20.4 20.8	
12H	12H 14.3 14.7 14.7 15.1 15.5	19.5 19.9 20.0 20.4 20.8	
8H	4H 14.4 14.8 14.8 15.2 15.6	19.6 20.0 20.0 20.4 20.8	
6H	6H 14.3 14.7 14.8 15.1 15.6	19.5 19.9 20.0 20.3 20.7	
8H	8H 14.3 14.6 14.7 15.0 15.5	19.5 19.8 19.9 20.2 20.7	
12H	12H 14.2 14.5 14.7 15.0 15.5	19.4 19.7 19.9 20.2 20.7	
12H	4H 14.3 14.7 14.8 15.1 15.6	19.5 19.9 20.0 20.3 20.8	
6H	6H 14.3 14.6 14.7 15.0 15.5	19.5 19.8 19.9 20.2 20.7	
8H	8H 14.2 14.5 14.7 15.0 15.5	19.4 19.7 19.9 20.2 20.7	
Variation of the observer position for the luminaire distances S			
S = 1.0H		+1.9 / -6.8	+1.4 / -3.1
S = 1.5H		+3.9 / -13.3	+2.8 / -7.6
S = 2.0H		+5.9 / -16.5	+4.7 / -11.6
Standard table		BK00	BK00
Correction Summand		2.8	3.3
Corrected Glare Indices referring to 2000lm Total Luminous Flux			

Dimensional Drawing

