



## M597MD41LED3840-W

**ARTEMIS recessed round super comfort trimless downlight, Medium light distribution, 10-cm Dia., 4000K, LED3, 1300 Lumens, 13W, White**



### About Product

ARTEMIS modern recessed round super comfort (Darklight) trimless downlight luminaire is designed and manufactured by Megalite for modern office and commercial lighting applications. Durability, UV free, excellent visual comfort, energy saving, glare control, environment friendliness, and higher than 80 color rendering index (CRI) are among the highlights of this luminaire.

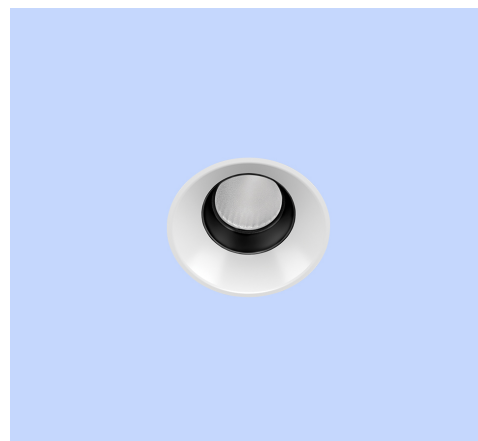

### Technical Information

Luminaire Name:	ARTEMIS
Catalog Code/product code:	M597MD41LED3840-W
Mounting Type:	Recessed-Gypsum false ceiling, Recessed-Concealed false ceiling, Recessed-Exposed false ceiling
Application:	Office, Hospitality, Shopping centers, Gallery and museum
Light source type:	LED
Module/ Lamp quantity:	1
CCT (Color temperature):	4000K - Neutral White
Light source:	LED
LED Module brand name:	Samsung
Lumen maintenance:	> 100.000 hours
Lumen maintenance factor:	L85
CRI (Color rendering index):	> 80
Power Consumption:	13
Luminous Flux:	1300
Efficacy (lm/W):	100
IP (Ingress Protection):	IP43 (Underside)
Insulation Class:	Class I
Ballast/ Driver:	Constant Current Driver (PF> 0.9)
Ballast/ Driver brand name:	TCI


**M597MD41LED3840-W**
**ARTEMIS recessed round super comfort trimless downlight, Medium light distribution, 10-cm Dia., 4000K, LED3, 1300 Lumens, 13W, White**

FLICKER:	Flicker Free
Ballast/ driver Spec:	Non-dimmable
Ballast/ Driver (Channel quantity):	Single channel
Mains voltage:	198~264 VDC, 220~240 VAC±10%
Voltage Frequency:	50/60 Hz
Wire / Cable Spec:	PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate
Terminal Spec:	Tool free wire connection, 2 pole (Size: 2.5), Cable looping is possible
Cable Looping:	Yes
Body Material:	Die-Cast aluminum
Body Coating:	Powder coated
Body Color:	White
RAL:	RAL9003
Body Characteristic:	Specially designed cooling feature
Reflector Material:	Polycarbonate
Reflector Coating:	Vacuum coat
Diffuser/Glass Material:	Polycarbonate
Diffuser/Glass Shape:	Frosted
Diffuser/Glass Characteristic:	Uniform light distribution
Light Distribution:	35 degrees
Clamp Material:	Stainless steel
Clamp Characteristic:	Easy and safe tool free installation of the luminaire
Bracket Material:	Sturdy powder coated high pressure die-cast aluminum
Packaging type:	Nylon cover and carton
Weight(Kg):	0.48
Dimensions(mm):	Ø110x97
Order Option (Routine option):	Dimmable DALI PUSH driver

## M597MD41LED3840-W

**ARTEMIS recessed round super comfort trimless downlight, Medium light distribution, 10-cm Dia., 4000K, LED3, 1300 Lumens, 13W, White**

### Photometric Graph

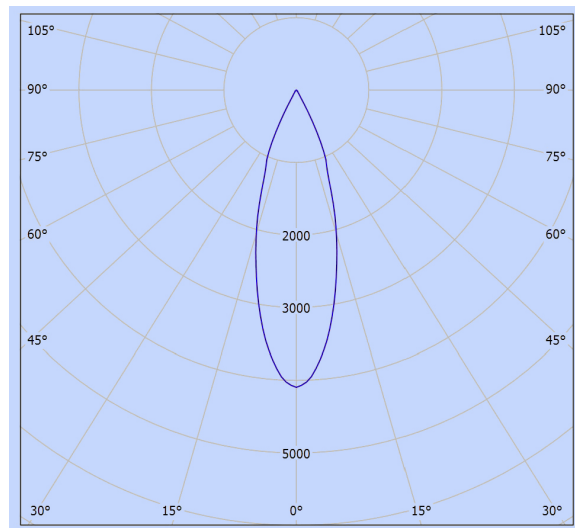

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-6.4	-5.8	-6.2	-5.6	-5.4	-6.4	-5.8	-6.2	-5.6	-5.4	
	3H	-6.6	-6.0	-6.3	-5.8	-5.5	-6.6	-6.0	-6.3	-5.8	-5.5	
	4H	-6.6	-6.1	-6.4	-5.8	-5.6	-6.6	-6.1	-6.4	-5.8	-5.6	
	6H	-6.7	-6.2	-6.4	-5.9	-5.7	-6.7	-6.2	-6.4	-5.9	-5.7	
	8H	-6.8	-6.3	-6.4	-6.0	-5.7	-6.8	-6.3	-6.4	-6.0	-5.7	
4H	12H	-6.8	-6.3	-6.5	-6.0	-5.7	-6.8	-6.3	-6.5	-6.0	-5.7	
	2H	-6.6	-6.1	-6.4	-5.8	-5.6	-6.6	-6.1	-6.4	-5.8	-5.6	
	3H	-6.8	-6.3	-6.5	-6.0	-5.7	-6.8	-6.3	-6.5	-6.0	-5.7	
	4H	-6.9	-6.5	-6.5	-6.1	-5.8	-6.9	-6.5	-6.5	-6.1	-5.8	
	6H	-6.9	-6.6	-6.5	-6.3	-5.9	-6.9	-6.6	-6.5	-6.3	-5.9	
8H	8H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	12H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	4H	-7.0	-6.7	-6.6	-6.3	-5.9	-7.0	-6.7	-6.6	-6.3	-5.9	
	6H	-7.1	-6.9	-6.6	-6.4	-6.0	-7.1	-6.9	-6.6	-6.4	-6.0	
	8H	-7.1	-6.9	-6.7	-6.5	-6.0	-7.1	-6.9	-6.7	-6.5	-6.0	
12H	12H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
	4H	-7.0	-6.8	-6.6	-6.4	-6.0	-7.0	-6.8	-6.6	-6.4	-6.0	
	6H	-7.1	-6.9	-6.7	-6.5	-6.0	-7.1	-6.9	-6.7	-6.5	-6.0	
	8H	-7.2	-7.0	-6.7	-6.6	-6.1	-7.2	-7.0	-6.7	-6.6	-6.1	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+4.8 / -8.3					+4.8 / -8.3					
S = 1.5H		+7.5 / -86.0					+7.5 / -86.0					
S = 2.0H		+9.5 / -84.0					+9.5 / -84.0					
Standard table		BK00					BK00					
Correction Summand		-15.2					-15.2					
Corrected Glare Indices referring to 1300lm Total Luminous Flux												

### Dimensional Drawing

